

# Locking rings

## Nickel-plated brass


### MATERIAL

Nickel-plated brass.

### FEATURES AND APPLICATIONS

GH. nuts can be used for fitting the following indicators to reservoirs with thin walls (thickness smaller than 5 mm):

- HGFT.
- HGFT-EX
- GN 743
- GN 743.1
- GN 743.2
- GN 743.3
- GN 743.4
- GN 743.5
- GN 743.6
- HGFT-PR
- HGFT-HT-PR
- GN 744
- HFTX.
- HFTX-PR
- HCFE.
- HCFE-C
- HCFE-EX

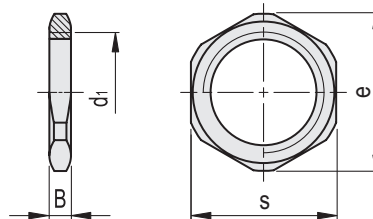

| Code     | Description    | d1       | B   | s  | e    | Δ    |
|----------|----------------|----------|-----|----|------|------|
| 14991-NK | GH. 1/4-NK     | G 1/4    | 3   | 15 | 16.5 | 6    |
| 15001-NK | GH. 3/8-NK     | G 3/8    | 3   | 19 | 21   | 3    |
| 15011-NK | GH. 1/2-NK     | G 1/2    | 4   | 24 | 26.5 | 7    |
| 15021-NK | GH. 3/4-NK     | G 3/4    | 4   | 30 | 33   | 12   |
| 15031-NK | GH. 1-NK       | G 1      | 4.5 | 37 | 40   | 14   |
| 15041-NK | GH. 1¼-NK      | G 1 1/4  | 5   | 46 | 50.5 | 19   |
| 15051-NK | GH. 2-NK       | G 2      | 6   | 65 | 71   | 40   |
| 14861-NK | GH. M12x1.5-NK | M 12x1.5 | 3   | 15 | 16.5 | 2    |
| 14871-NK | GH. M14x1.5-NK | M 14x1.5 | 3   | 18 | 20   | 2.5  |
| 14881-NK | GH. M16x1.5-NK | M 16x1.5 | 3   | 19 | 21   | 3    |
| 14891-NK | GH. M20x1.5-NK | M 20x1.5 | 3   | 24 | 26.5 | 5    |
| 14901-NK | GH. M25x1.5-NK | M 25x1.5 | 3.5 | 30 | 33   | 8.5  |
| 14911-NK | GH. M26x1.5-NK | M 26x1.5 | 3.5 | 30 | 33   | 8.5  |
| 14921-NK | GH. M27x1.5-NK | M 27x1.5 | 4   | 32 | 35   | 7    |
| 14931-NK | GH. M30x1.5-NK | M 30x1.5 | 4   | 35 | 38.5 | 12   |
| 14941-NK | GH. M33x1.5-NK | M 33x1.5 | 4   | 41 | 45   | 12.5 |
| 14951-NK | GH. M35x1.5-NK | M 35x1.5 | 5   | 40 | 44   | 15.5 |
| 14961-NK | GH. M40x1.5-NK | M 40x1.5 | 4.5 | 46 | 50.5 | 23   |
| 14971-NK | GH. M42x1.5-NK | M 42x1.5 | 5   | 45 | 50   | 17.5 |
| 14981-NK | GH. M42x2-NK   | M 42x2   | 5   | 45 | 50   | 18   |