GN 3017.5

Spring Clamps

Steel


SPECIFICATION

Steel ST
Zinc plated


INFORMATION
Spring clamps GN 3017.5 secure hose assemblies to hose barbs and hose nipples in low-pressure applications.
The spring force of the bent wire presses onto the elastic hose material to provide a tight connection. The wire spring clamp is installed by pressing the two arms together with a pliers to open the clamp.

ON REQUEST
- Additional clamping ranges
- Other materials





Assembly instruction

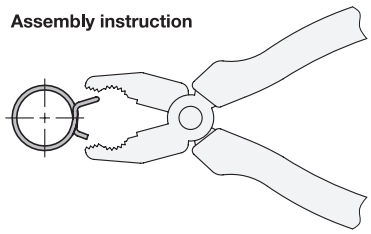


GN 3017.5


Description	d_1 Nominal dimension	d_1 Clamping range Ø	d_2	h max.	⚖
GN 3017.5-6,1-ST	6.1	5.8...6.4	0.9	5	1
GN 3017.5-6,8-ST	6.8	6.6...7	0.9	5	1
GN 3017.5-7,3-ST	7.3	7...7.5	0.9	5	1
GN 3017.5-7,6-ST	7.6	7.3...7.8	0.9	5	1
GN 3017.5-8,1-ST	8.1	7.8...8.3	0.9	5	1
GN 3017.5-8,6-ST	8.6	8.3...8.8	1	5.5	1
GN 3017.5-9,1-ST	9.1	8.8...9.3	1	5.5	1
GN 3017.5-9,6-ST	9.6	9.3...9.9	1	5.5	1
GN 3017.5-10,1-ST	10.1	9.8...10.4	1	5.5	1
GN 3017.5-10,7-ST	10.7	10.4...11	1.2	6.3	1
GN 3017.5-11,3-ST	11.3	11...11.6	1.2	6.3	1
GN 3017.5-11,9-ST	11.9	11.6...12.3	1.2	6.3	2
GN 3017.5-12,8-ST	12.8	12.1...13.1	1.2	6.3	2
GN 3017.5-13,3-ST	13.3	12.9...13.6	1.5	7.3	2
GN 3017.5-13,7-ST	13.7	13.3...14.1	1.5	7.3	2
GN 3017.5-14-ST	14	13.6...14.4	1.5	7.3	2
GN 3017.5-14,8-ST	14.8	14.4...15.1	1.5	7.3	3
GN 3017.5-15,6-ST	15.6	14.8...15.9	1.5	7.3	3
GN 3017.5-15,8-ST	15.8	15.5...16.2	1.8	8.4	3
GN 3017.5-16,4-ST	16.4	15.9...16.8	1.8	8.4	3
GN 3017.5-17,3-ST	17.3	16.8...17.7	1.8	8.4	3
GN 3017.5-18,2-ST	18.2	17.7...18.7	1.9	9.1	4
GN 3017.5-19,2-ST	19.2	18.7...19.6	2	9.1	4
GN 3017.5-20,2-ST	20.2	19.6...20.6	2	9.1	4
GN 3017.5-21,2-ST	21.2	20.6...21.6	2	9.1	5

ELESA and GANTER models all rights reserved in accordance with the law.
Always mention the source when reproducing our drawings.

GN 3017.5 | Spring Clamps



Assembly instruction

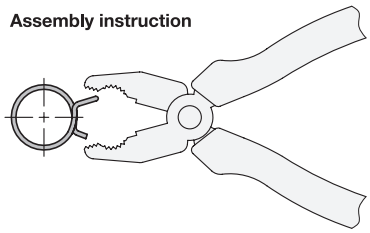

GN 3017.5

Description	d_1 Nominal dimension	d_1 Clamping range Ø	d_2	h max.	⚖
GN 3017.5-22,1-ST	22.1	21.5...22.6	2	9.1	6
GN 3017.5-22,6-ST	22.6	22...23.1	2.2	10.7	6
GN 3017.5-23,1-ST	23.1	22.5...24	2.2	10.7	6
GN 3017.5-24,2-ST	24.2	23.5...24.7	2.2	10.7	7
GN 3017.5-25,2-ST	25.2	24.4...26	2.2	10.7	9
GN 3017.5-25,8-ST	25.8	25.1...26.4	2.2	10.7	9
GN 3017.5-26,8-ST	26.8	25.8...27.4	2.5	11.4	9
GN 3017.5-27,5-ST	27.5	26.7...28.1	2.5	11.4	9
GN 3017.5-28,7-ST	28.7	27.9...29.4	2.5	11.4	10
GN 3017.5-30-ST	30	29.3...30.9	2.5	11.4	13
GN 3017.5-31,3-ST	31.3	30.4...32	2.5	11.4	13
GN 3017.5-32,7-ST	32.7	32...34.1	2.8	12.8	14
GN 3017.5-34,1-ST	34.1	33.2...34.8	2.8	12.8	14
GN 3017.5-35-ST	35	33.9...35.7	2.8	12.8	14
GN 3017.5-35,6-ST	35.6	34.6...36.4	3	14	17
GN 3017.5-37,2-ST	37.2	36.2...38	3	14	18
GN 3017.5-38,8-ST	38.8	37.7...39.7	3	14	20
GN 3017.5-40-ST	40	38...41	3	14	20
GN 3017.5-40,5-ST	40.5	39.4...41.4	3	14	22
GN 3017.5-42,9-ST	42.9	41...44	3.2	14.8	22
GN 3017.5-44,4-ST	44.4	42.5...45.5	3.2	14.8	24
GN 3017.5-46-ST	46	44...47	3.2	14.8	24
GN 3017.5-47-ST	47	46...49	3.2	14.8	25
GN 3017.5-49,8-ST	49.8	48.4...50.9	3.2	15.9	30
GN 3017.5-52-ST	52	50.6...53.2	3.2	15.9	32

ELESA and GANTER models all rights reserved in accordance with the law.
Always mention the source when reproducing our drawings.